



Smart 216 IP/Smart 232 IP

Multi-user, remote access KVM switch for rack environments

- 3 simultaneous KVM users (2 remote and 1 local)
- 2 additional serial session users
- BIOS level access
- USB keyboard and mouse console
- Compatible with KVM.net® II centralized management system
- Innovative Minicom KVM over CAT5 technology
- Multi-platform - PS/2 and USB support
- Extends distance between servers and switch up to 30 meters/100 feet
- Space saving - sleek, 1U rack mountable
- Seamless power control
- 3 year warranty

Simultaneous remote and local access to servers

The Smart 216 IP and Smart 232 IP enable one local and two remote users, access and control of up to 16 or 32 servers. In addition, two remote users can operate serial sessions for controlling serial devices such as routers, managed network switches or PDU's. These rack-mountable, 1U sized switches feature Minicom KVM over CAT5 technology that directly connects the switch to each computer in the server room, eliminating cable clutter and providing up to 30m/100ft of distance between server and switch. The Smart 216 IP and Smart 232 IP also have built-in web servers enabling two remote users seamless access to target servers via a single IP address.


From server rooms to data centers

The Smart 216 IP and Smart 232 IP overcome many of the challenges facing distributed server rooms and data centers - making them the ideal solution for forward looking corporations requiring a versatile, high-performance KVM switch. And if tomorrow the need arises for centralized management, the Smart line of switches all offer seamless integration into Minicom's centralized management system - KVM.net® II.

Industry standard security protocol

Minicom utilizes the highly secure 128-bit SSL protocol to guard your corporate data through every kind of remote access device. This technology efficiently prevents unauthorized access and security breaches.

SMART 216/232 – TYPICAL APPLICATION

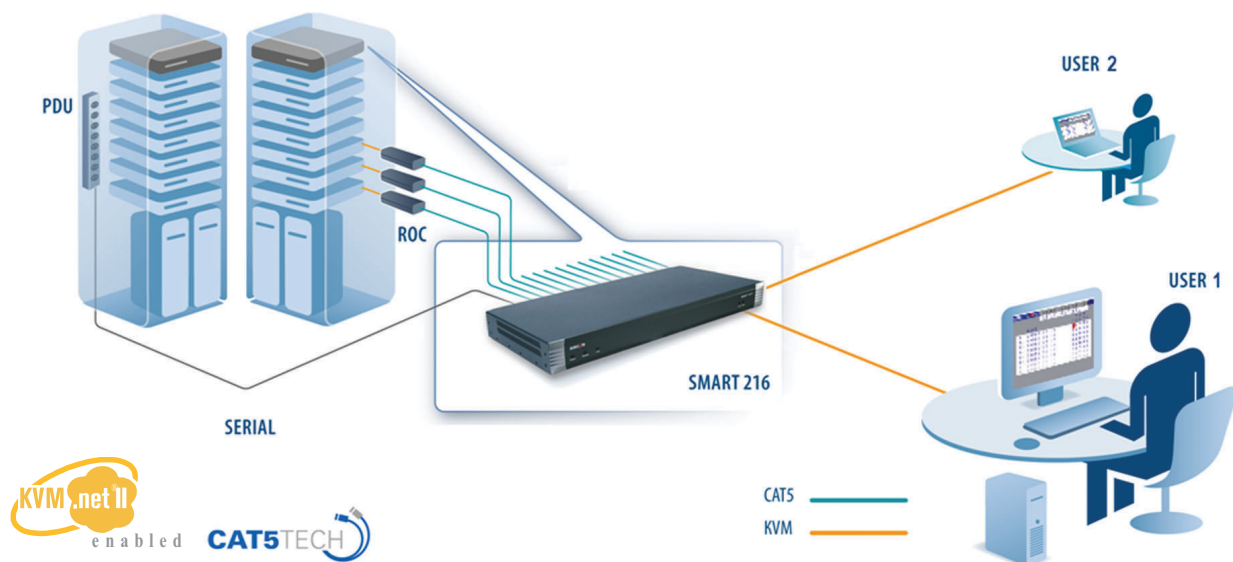

Technical Specifications

Operating Systems	Target Server Windows, Novell, Linux, SUN Solaris Client Computer Windows 2000 or higher with IE 6.0 or higher and ActiveX
Resolution	Target Server 1600 x 1200 @ 85Hz Client Computer Recommended: Resolution should be higher than local computer resolution
Video & Mouse Sync	Both auto and manual modes
Distance Switch to ROCs	30m/100ft
Security	128-bit SSL encryption
System Cable ROC to Switch	CAT5 UTP/FTP Solid Wire 2 x 4 x 24 AWG
Connection Type	Ethernet - RJ45 - 10/100 Mbit/sec autosensing Serial - RJ45 x 2 Local KVM Connection - Screen HDD15, keyboard/mouse - 2 USB Servers - RJ45
Product Weight	2,343 Kg / 5.165 lbs
Shipping Weight	3,6 Kg / 7.936 lbs
Dimensions	44H x 270D x 431W mm / 1.7H x 10.6D x 17W in
Power Supply	100 - 240 VAC 50 / 60 Hz
Warranty	3 year
Operating Temperature	0°C to 40°C / 32°F to 104°F Storage
Temperature	-40°C to 70°C / -40°F to 158°F
Humidity	80% non-condensing relative humidity
	ROC PS/2 ROC USB
Connection	VGA HDD15, KM MiniDin6, System RJ45 VGA HDD15, KM USB, System RJ45
Power	From computer's keyboard port From USB port
Product Weight	100 g / 0.20 lbs
Shipping Weight	172 g / 0.38 lbs
Product Dimensions	65 x 25 x 25mm / 0.21 x 0.08 x 0.08in
Package Dimensions	225 x 150 x 52mm / 8.7 x 5.9 x 2.05in

Ordering and Shipping Information

Product	Part	UPC Code
Smart 216 IP	OSU70036	654518209938
Smart 232 IP	OSU70037	654518209945
ROC PS/2	OSU51078	654518209358
ROC USB	OSU51079	654518209365


Smart 216 IP



Smart 232 IP



ROC USB



ROC PS2



www.minicom.com

International HQ
Jerusalem, Israel
T: +972 2 535 9666
F: +972 2 535 9693
minicom@minicom.com

Rome, Italy
T: +39 06 820 97 902
F: +39 06 820 97 903
info.italy@minicom.com

North American HQ
New Jersey, USA
T: +888 486 2154
T: +908 486 2100
F: +908 486 7788
info.usa@minicom.com

Kiel, Germany
T: +49 431 668 7933
F: +49 431 668 7934
info.minicom-germany@minicom.com

European HQ
Dübendorf, Switzerland
T: +41 44 823 8000
F: +41 44 823 8005
info.minicom-europe@minicom.com

Vincennes, France
T: +33 1 49 57 00 00
F: +33 1 49 57 00 00
info.france@minicom.com

Beijing, China
T: +86 10 8586 0620
F: +86 10 8586 8815 and
info.china@minicom.com

United Kingdom
T: +44 121 288 0608
info.uk@minicom.com